



VASHI ELECTRICALS PVT. LTD.

Email : sales@vashielectricals.com • Website : www.vashielectricals.com

BHIWANDI :

A-6, Plot No. 74, Shree Ganesh Complex, Behind Gupta Compound,
Gundavali Village, Dapode Road, Mankoli Naka, Bhiwandi - 421305.
Tel. : 02522661600 / 02522661668 / 9322549817



NAVI MUMBAI :

Sagar Ratan Premises, Plot No. D-265, MIDC, Turbhe, New Mumbai - 400 705.
Tel. : 91-22-6791 1445 • Fax : 91-22-2767 0490

POLYCAB[®]

WIRES & CABLES

3 CORE FLAT SUBMERSIBLE CABLES

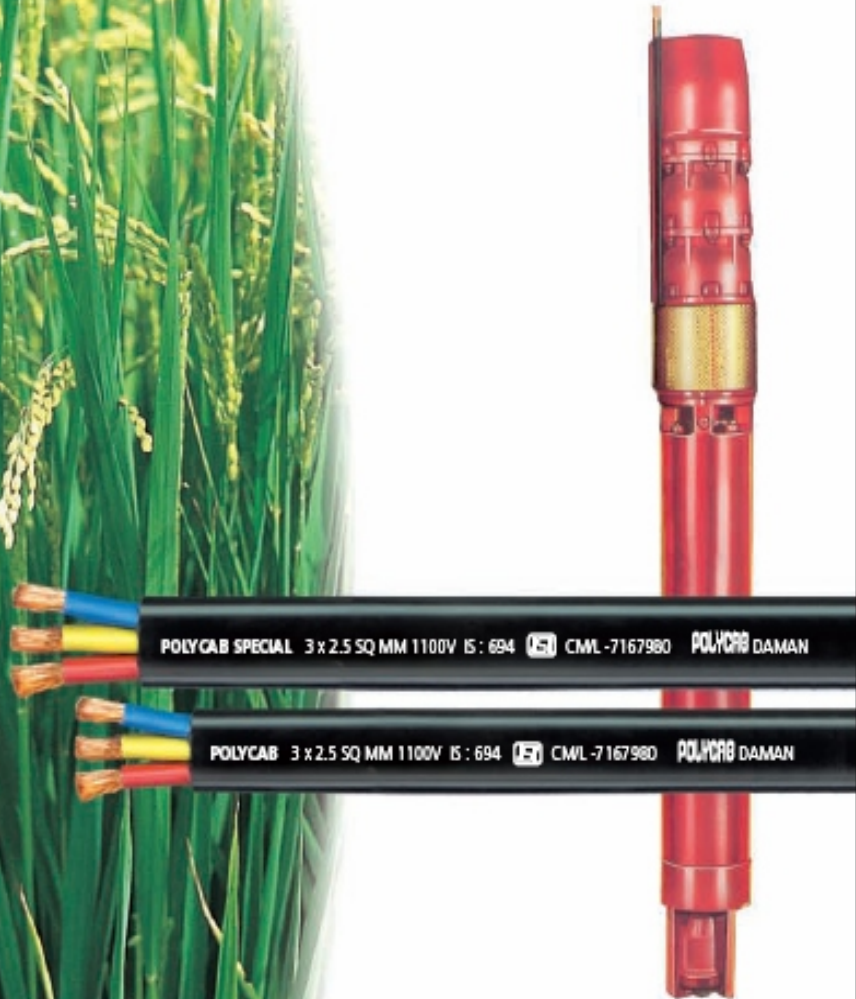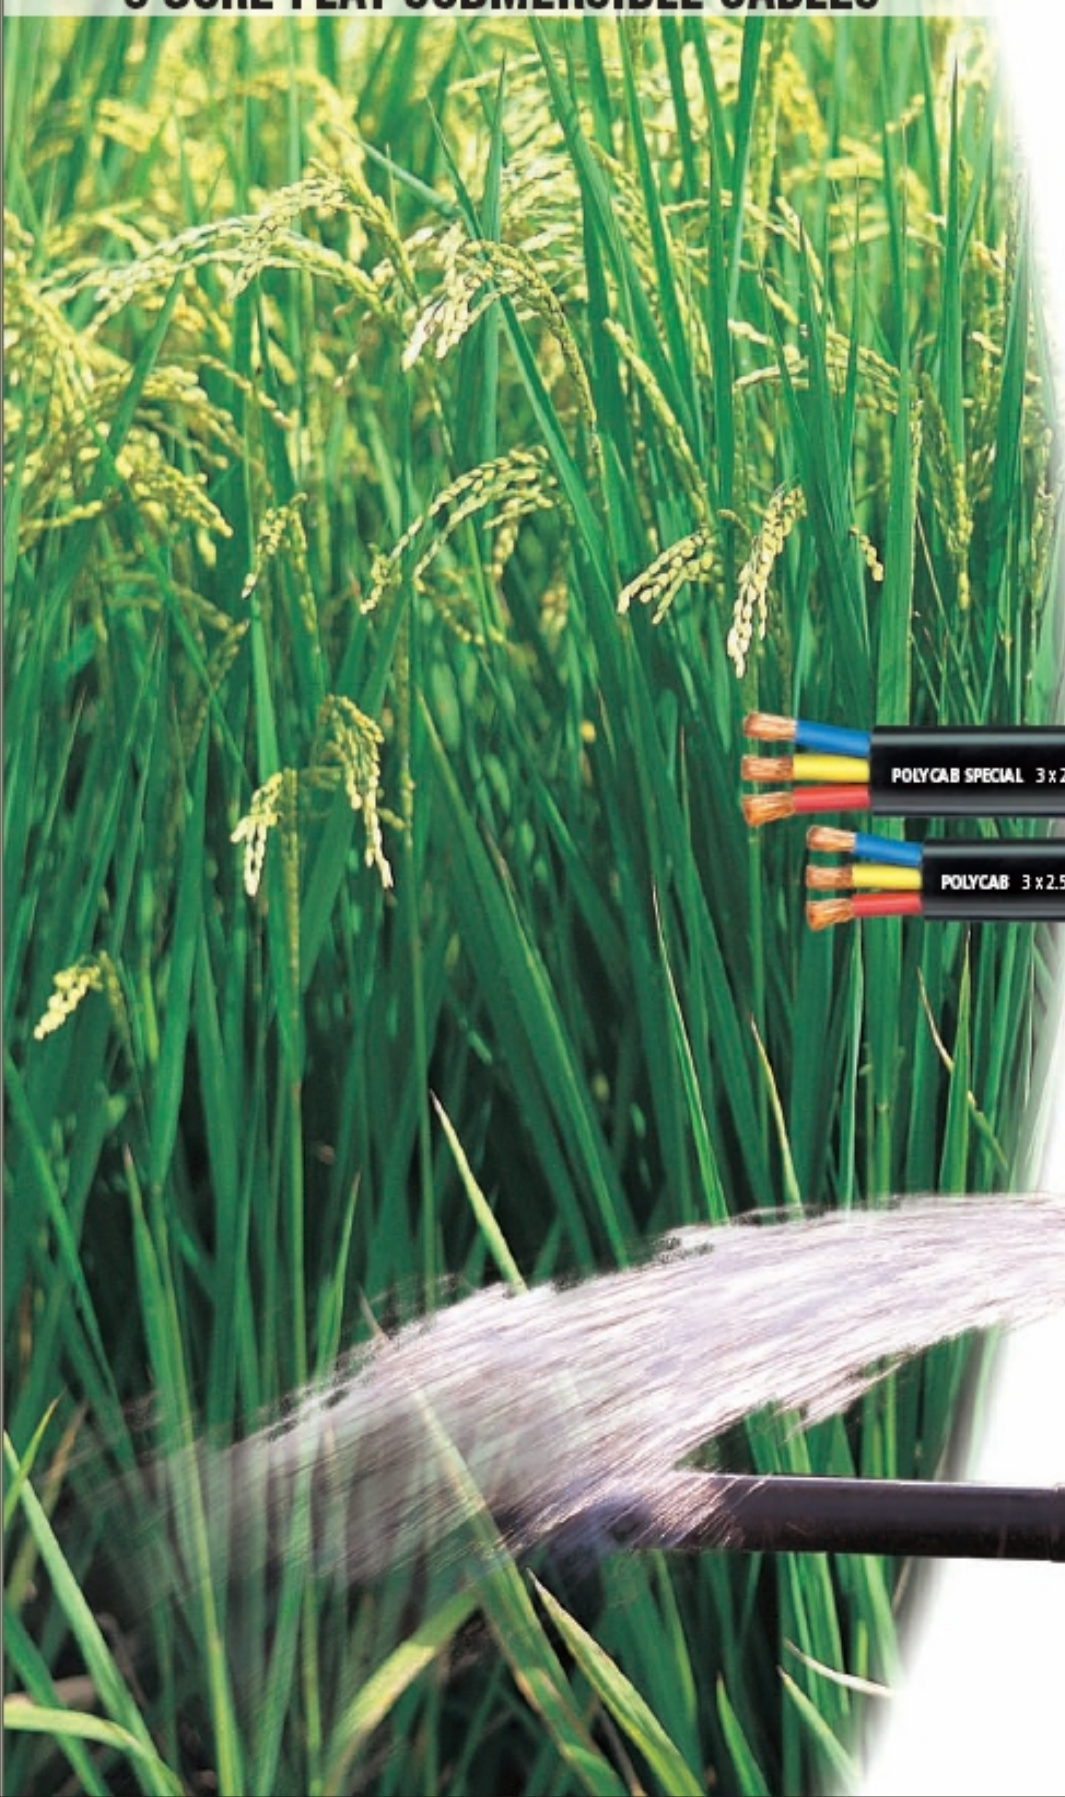

ISO 9001:2000
IS : 694
CML/L - 7167980

3 CORE FLAT CABLES FOR SUBMERSIBLE PUMP MOTORS


'Polycab Special' 3 Core Flat Cables are manufactured for critical space requirement, protection against indefinite immersion in water under specified conditions, protection against rain-water and against ingress of small solid foreign bodies.

'Polycab Special' 3 Core Flat Cables are produced from best quality electrolytic copper, which is drawn, annealed on-line and bunched on automatic machines to ensure flexibility and uniform resistance. The conductors are insulated with a special grade of PVC on sophisticated co-extrusion lines. Outer sheath consists of highly abrasion resistant PVC compound impervious to grease, oil and water etc.

'POLYCAB SPECIAL' – 3 Core Flat Cables (as per IS 694 : 1990 – ISI marked)

Conductor		Insulation Thickness (Nom.) mm	Sheath		Conductor Resistance @ 20° C (Max.) Ohms/km	Current Carrying Capacity @40° C Amps
Area (Nom.) Sq. mm	No./dia. of strands mm		Overall dimensions			
			Thickness (Nom.) mm	Size (Approx.) (W x T) mm		
1.5	22/0.3	0.8	1.1	11.6 x 5.5	12.10	16
2.5	36/0.3	0.9	1.2	13.9 x 6.4	7.41	22
4.0	56/0.3	1	1.3	16.1 x 7.1	4.95	29

Note : Insulation thickness, Sheath thickness and Overall Dimensions given in this table are nominal values. The strand diameter is nominal. However, Construction of the conductor is designed to satisfy the requirement of conductor resistance as per IS 8130 :1984.

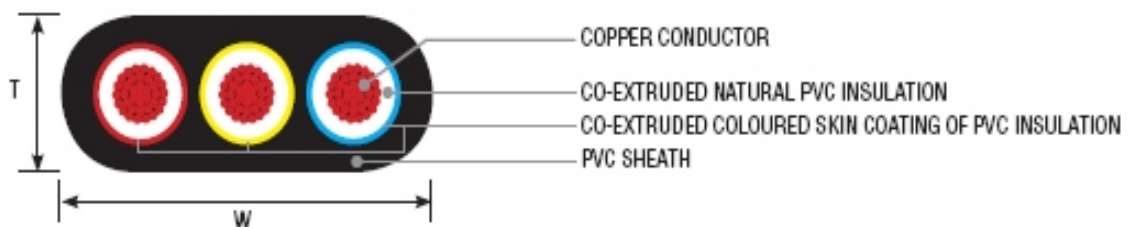

'POLYCAB SPECIAL' – 3 Core Flat Cables (generally conforming to IS : 694)

Conductor		Insulation Thickness (Nom.) mm	Sheath		Conductor Resistance @ 20° C (Max.) Ohms/km	Current Carrying Capacity @40° C Amps
Area (Nom.) Sq. mm	No./dia. of strands mm		Overall dimensions			
			Thickness (Nom.) mm	Size (Approx.) (W x T) mm		
6	84/0.3	1.1	1.4	18.6 x 8.0	3.30	37
10	80/0.4	1.3	1.6	23.4 x 10.0	1.91	51
16	126/0.4	1.4	1.8	27.0 x 11.4	1.21	68
25	196/0.4	2	2.2	35.4 x 15.0	0.78	86
35	276/0.4	2.1	2.2	39.3 x 16.3	0.554	110
50	396/0.4	2.2	2.4	45.7 x 18.5	0.396	145

Note : 3 Core x 70 sq. mm & 3 Core x 95 sq. mm Flat Cables are available on request

'POLYCAB' – 3 Core Flat Cables (as per IS 694 : 1990 – ISI marked)

'Polycab' 3 Core Flat Cables are having the same features of 'Polycab Special' Submersible Cables as given above. These are having minimum insulation and sheathing thicknesses as specified in the IS 694 : 1990.

Conductor		Insulation		Sheath		Conductor Resistance @ 20° C (Max.) Ohms/km	Current Carrying Capacity @40° C Amps
Area (Nom.) Sq. mm	No./dia. of strands mm	Thickness (Nom.) mm	Core dia. (Nom.) mm	Overall dimensions			
				Thickness (Nom.) mm	Size (Approx.) (W x T) mm		
1.5	22/0.3	0.6	2.8	0.9	11.0 x 5.0	12.10	16
2.5	36/0.3	0.7	3.4	1.0	13.0 x 6.0	7.41	22
4.0	56/0.3	0.8	4.1	1.0	15.3 x 6.7	4.95	29



VASHI ELECTRICALS PVT. LTD.

Email : sales@vashielectricals.com • Website : www.vashielectricals.com

BHIWANDI :

A-6, Plot No. 74, Shree Ganesh Complex, Behind Gupta Compound,
Gundavali Village, Dapode Road, Mankoli Naka, Bhiwandi - 421305.
Tel. : 02522661600 / 02522661668 / 9322549817

NAVI MUMBAI :

Sagar Ratan Premises, Plot No. D-265, MIDC, Turbhe, New Mumbai - 400 705.
Tel. : 91-22-6791 1445 • Fax : 91-22-2767 0490